

DC filter for photovoltaic converters

new



### Description

- Compact DC filter for photovoltaic systems
- High symmetrical and asymmetrical attenuation
- In the frequency range from 150kHz up to 300MHz

### Standards

- IEC 60939
- UL 1283, Edition 5, CSA 22.2 No. 8-M1986, @ Ta 55 (75) °C

### Approvals

- UL File Number: E72928

### Applications

- Voltage up to 1200 VDC for world wide acceptance
- UL approved 1000VDC, 250 - 1500A and 600VDC, 25 - 150A
- Helps to meet international EMC standards
- Version with low leakage on request

### Weblinks

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


### Technical Data

Rated Current	25 - 1500A @ Ta 55 (75) °C
Rated voltage	1200VDC MAX.
Approval for	25 - 1500A @ Ta 55 °C
Overload Current	1.5 x Ir
Number of Filter Stages	1
Weight	1 - 17 kg
Material: Housing	Metal
Sealing Compound	UL 94V-2

Mounting	Screw-on mounting on chassis, from top
Terminal	Screw clamps for types up to 150 A and copper bars for types upwards of 250 A.
Operating Temperature [°C]	-40 °C to 100 °C
Climatic Category	40/100/21 acc. to IEC 60068-1
Degree of Protection	IP 20 (25A-150A types), IP 00 (250A-1500A types) acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140


### Dimensions

Case 2P

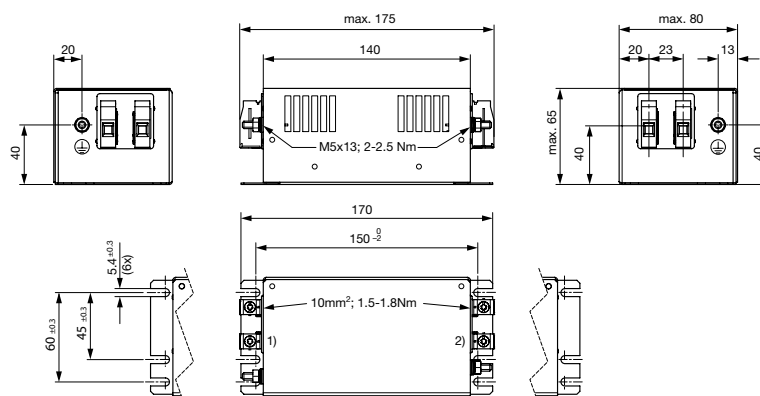


- 1) PV module
- 2) Inverter

### Case 2Q

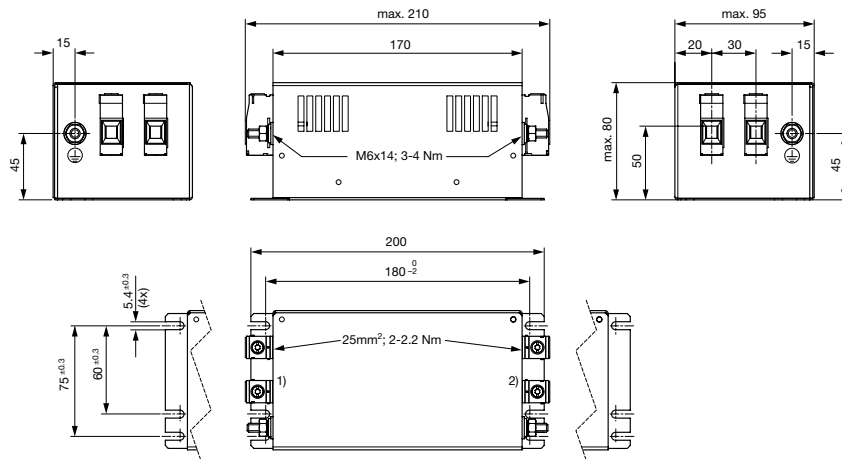


- 1) PV module
- 2) Inverter

### Case 2R

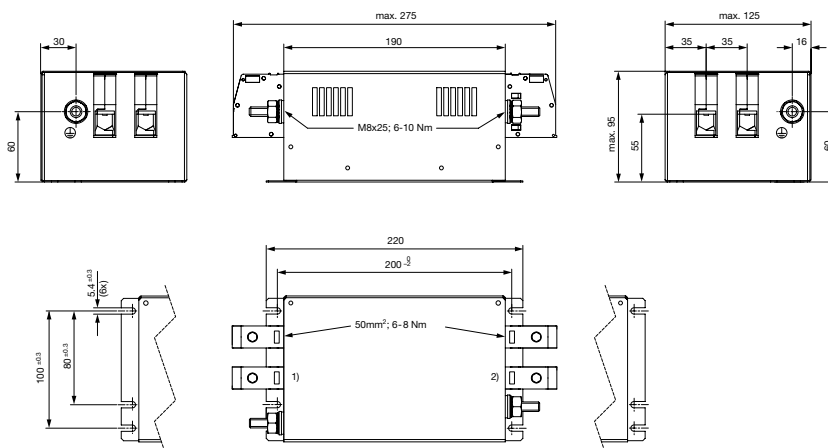


- 1) PV module
- 2) Inverter

Case 2S

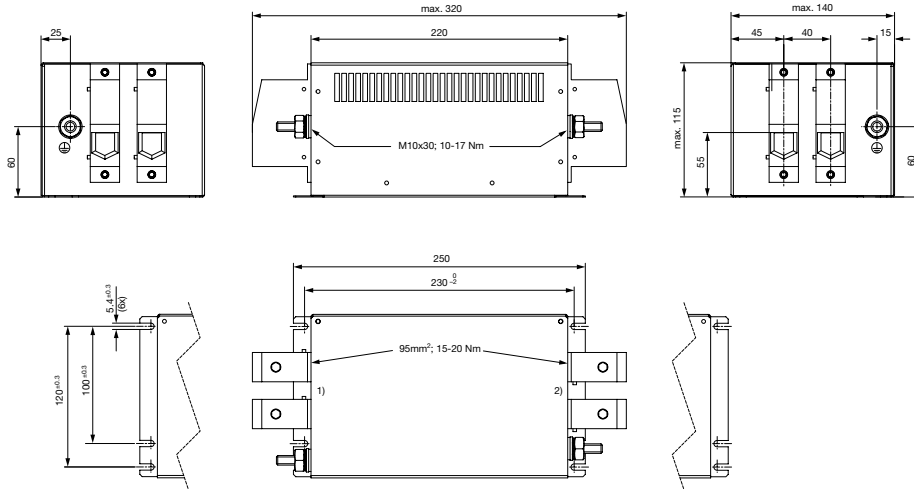


- 1) PV module
  - 2) Inverter
- Case 2T

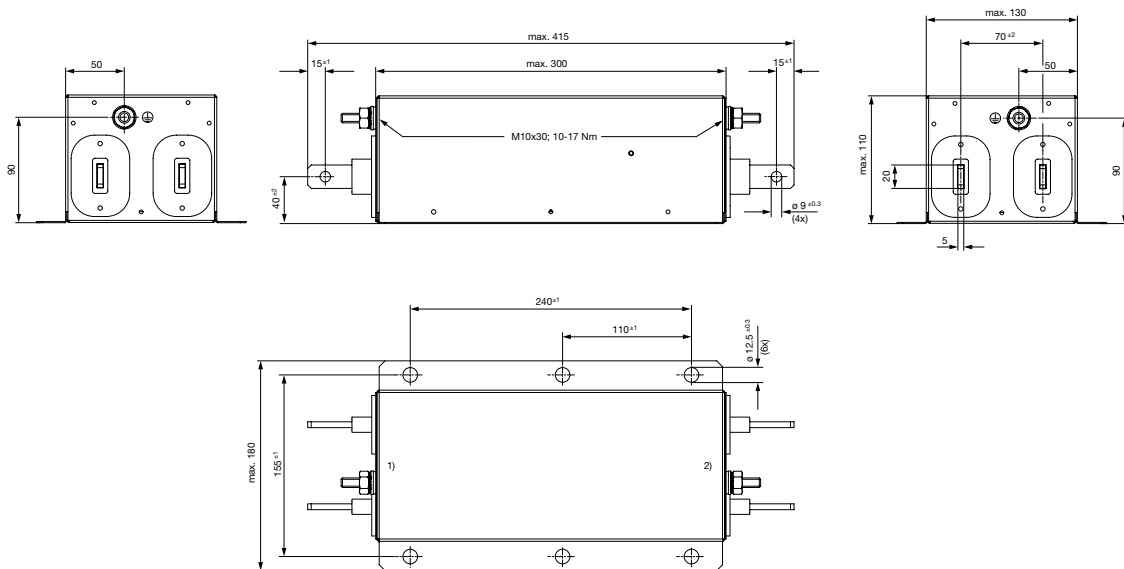


- 1) PV module
- 2) Inverter

### Case 2U1

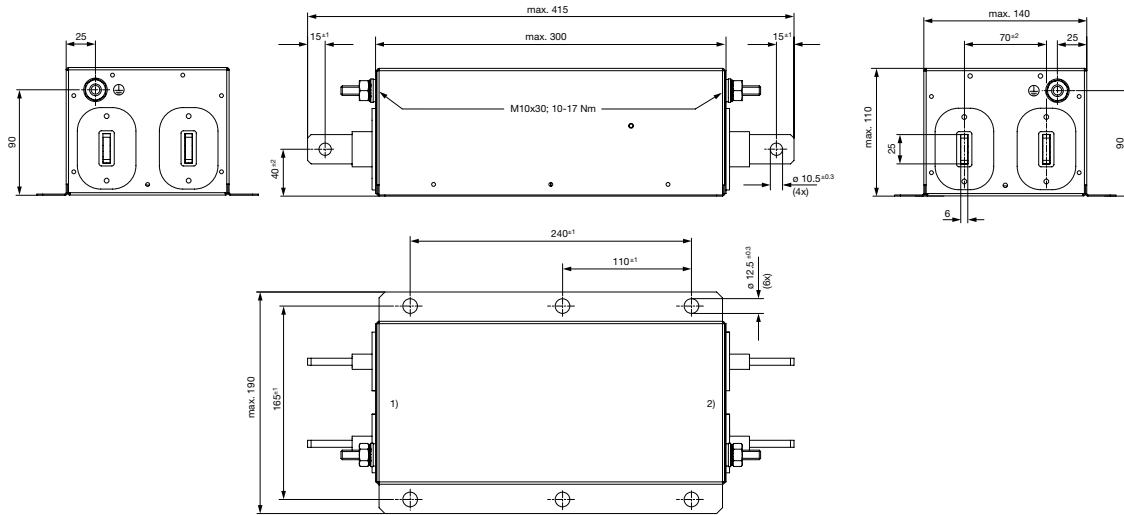


- 1) PV module
- 2) Inverter

### Case 2U2

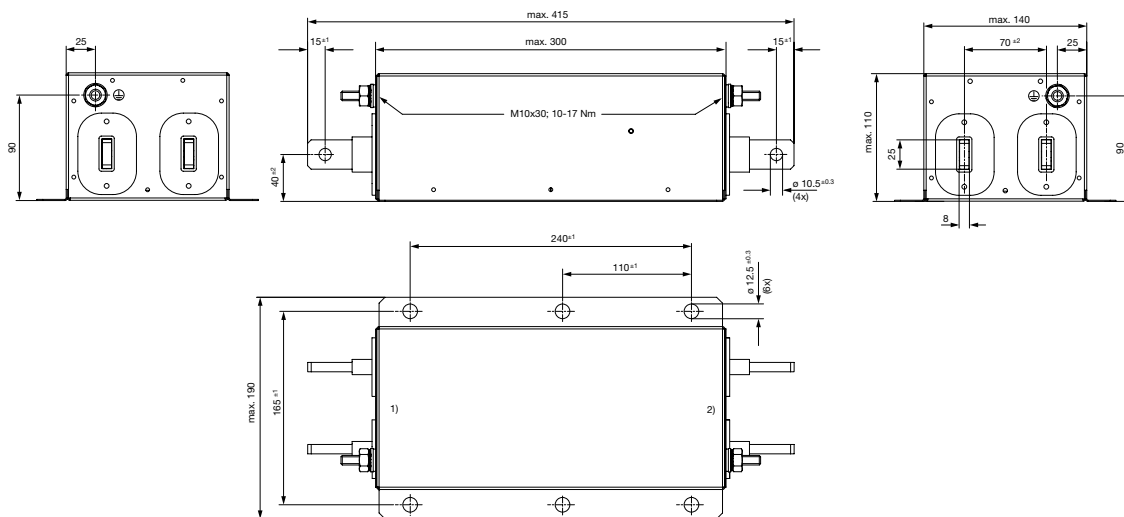


- 1) PV module
- 2) Inverter

Case 2V

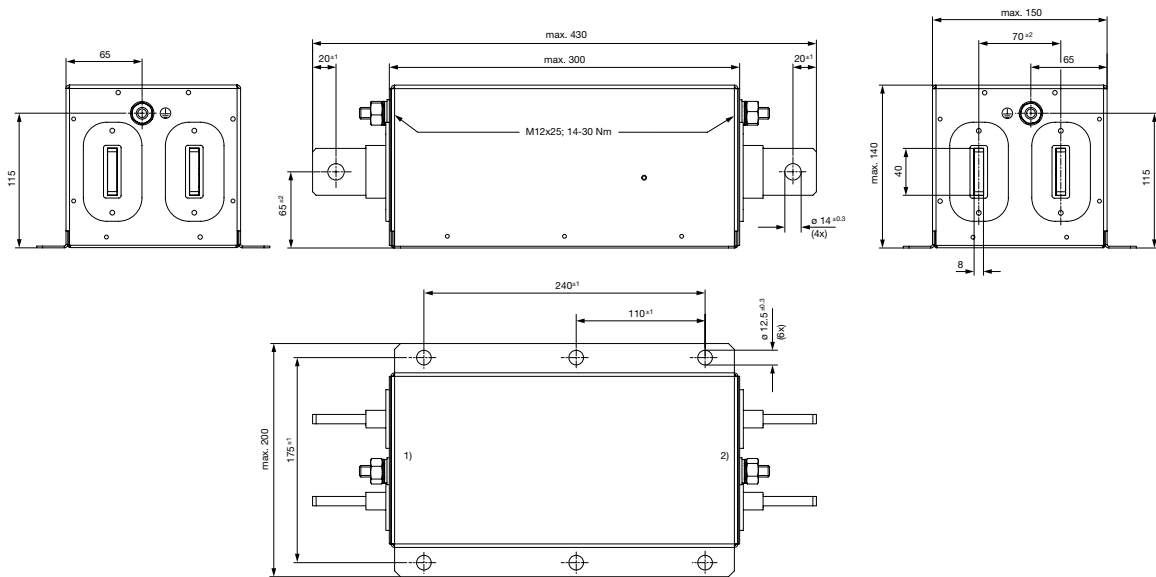


- 1) PV module
  - 2) Inverter
- Case 2W

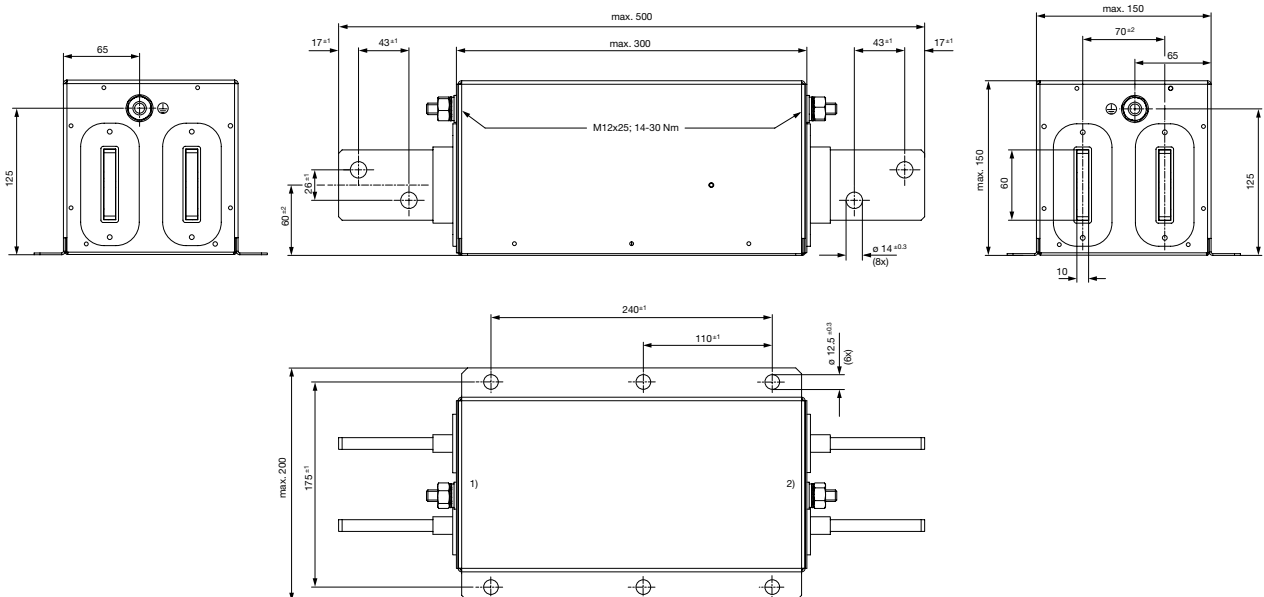


- 1) PV module
- 2) Inverter

## Diagrams

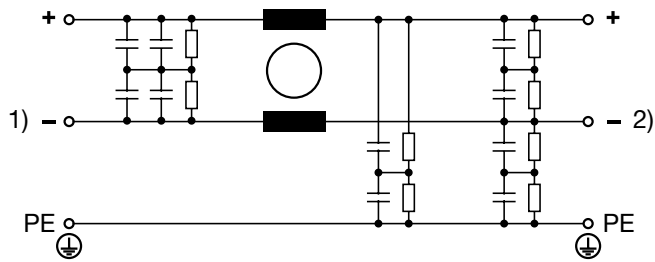


- 1) Photovoltaic module
- 2) Frequency inverter

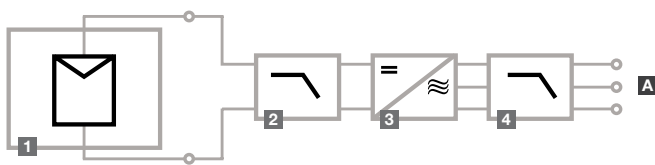

- 1) Photovoltaic module
- 2) DC filter
- 3) Frequency inverter
- 4) AC filter
- A) Power grid

## Derating Curves


Permissible Working Current as a Function of Ambient Temperature

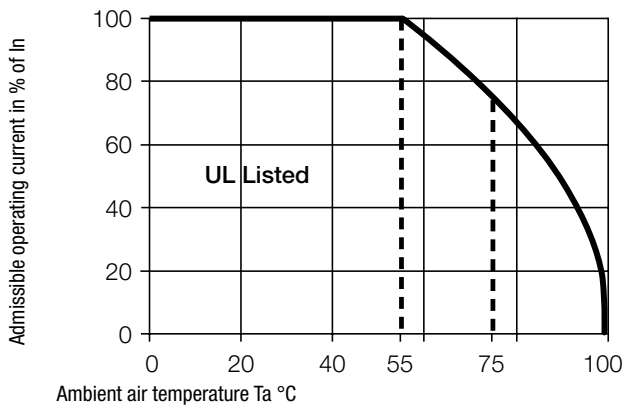


**Attenuation Loss** . . . . . 0.1/100Ω differential mode ..... 100/0.1Ω differential mode - - - - differential mode \_\_\_\_ common mode

Standard version


25 A

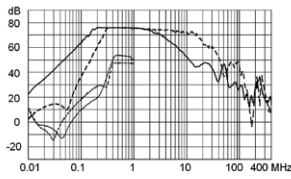


50 A

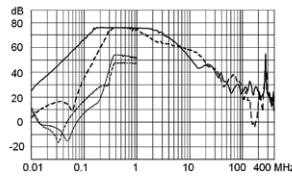


75 A

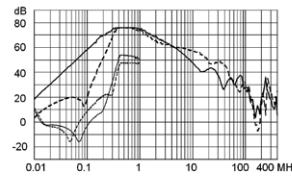


100 A

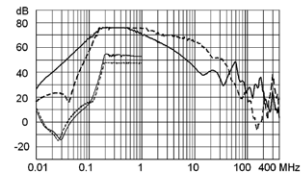


150 A

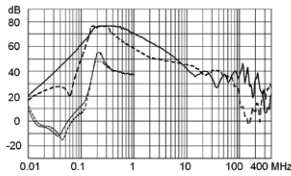


250 A

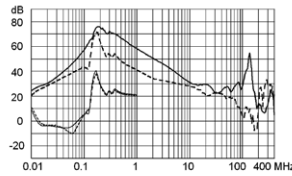


400 A

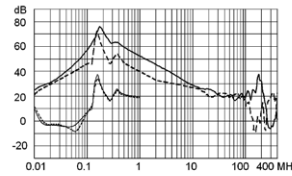


600 A

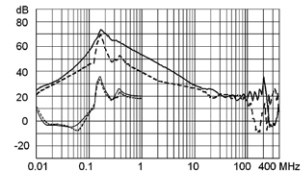


800 A

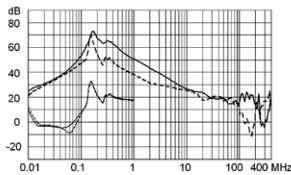

1000 A

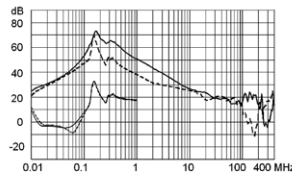

1500 A

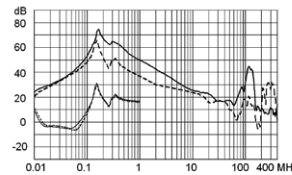

**Variants**

Rated Current @ Ta 55°C (75°C) [A]	Rated Voltage [VDC]	cURus approval [VDC]	Power <sub>loss</sub> [W]	Weight [kg]	Housing	Order Number
25 (19)	1200	600	4,1	1	2P	FMER-G92P-2517
50 (37)	1200	600	11,5	2	2Q	FMER-G92Q-5017
75 (56)	1200	600	11,3	2	2Q	FMER-G92Q-7517
100 (75)	1200	600	12,6	3	2R	FMER-G92R-J017
150 (112)	1200	600	17,6	5	2S	FMER-G92S-J517
250 (186)	1200	1000	7,8	8	2T	FMER-G92T-K557
400 (298)	1200	1000	13,3	9	2U1	FMER-G92U-M057
600 (447)	1200	1000	22,4	10	2U2	FMER-G92U-U057
800 (596)	1200	1000	24,8	13	2V	FMER-G92V-Q057
1000 (745)	1200	1000	38,8	13	2V	FMER-G92V-S057
1500 (1118)	1200	1000	45,0	17	2W	FMER-G92W-S557

Variants with low leakage current on request