

Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC



1000 VDC · 600 VAC/DC · 30 A (UL/CSA)

**Description**

- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

Standards

- UL 4248-1
- CSA C22.2 no. 39

Approvals

- UL File Number: E39328
- CSA File Number: 248899

Applications

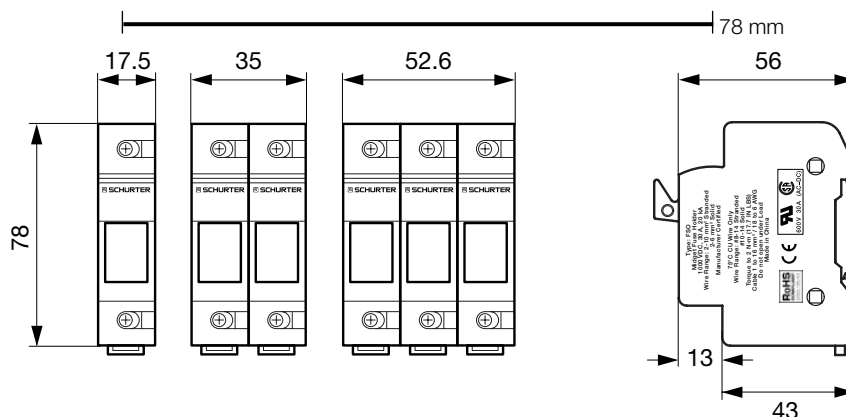
- Combiner Boxes in Photovoltaic Systems

References**Weblinks**

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | |
|------------------------------|---|
| Fuse-Link | 10.3 x 38 mm |
| Mounting | DIN-Rail Mounting |
| Terminal | Press plate: 2 - 10 mm ² / AWG #8 - 14 (stranded), 2 - 6 mm ² , AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque) |
| Rated Voltage | 1000VDC (Self certified), 600 VAC/DC (UL/CSA) |
| Rated Current | 30A (UL/CSA), 30A (UL/CSA) |
| Degree of Protection | IP 20 |
| Admissible Ambient Air Temp. | -40 °C to 130 °C |
| Material: Socket | Thermoplastic, UL 94V-2 |
| Unit Weight (Socket/Cap) | 54 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking | Type, Tech. Information |

Abmessungen

Do not open under load

Variants

| Holder | Remark | Order Number |
|--------|---------|--------------|
| ● | 1 Pole | 0091.0001 |
| ● | 2 Poles | 0091.0002 |
| ● | 3 Poles | 0091.0003 |

| | | |
|-----------------------|-----------|----------------|
| Packaging Unit | 0091.0001 | Bulk (10 pcs.) |
| | 0091.0002 | Bulk (5 pcs.) |
| | 0091.0003 | Bulk (4 pcs.) |
